

Pulsed laser diode illuminator (QD-Qxy24-ILO(4))

Laser solutions by LUMIBIRD



Multi-wavelength emission

MAIN FEATURES

- UP TO 8 mJ NIR LASER DIODE ILLUMINATOR
- SUPERGAUSSIAN TEMPORAL PULSE SHAPE
 - 80 to 130 ns (FWHM)
- UP TO 4 WAVELENGTHS TOGETHER
 - Standard wavelengths: 808, 905, 980 nm
 - Any combination of wavelengths is possible
 - Each wavelength can be triggered independently
- HIGH REPETITION RATE
 - Up to 6 kHz in continuous mode
 - Up to 10 kHz in burst mode
- UP TO 2W AVERAGE POWER WITH NATURAL CONVECTION SUCH AS:
 - 1 wavelength at 2 mJ at 1 kHz
 - 4 wavelengths at 2 mJ each at 250 Hz
- HIGH EFFICIENCY DIODE BARS
- FAST AXIS COLLIMATION
- EXTERNAL POWER SUPPLY REQUIRED
 - 120 VDC for pulse energy
 - 12 VDC for driver PCB
- COMPACT AND PORTABLE
- PROTECTIVE HOUSING
- ROBUST DESIGN
 - High reliability (> 100 x 10⁹ shots)
 - Shock and vibration resistant
 - Qualified for defense and space applications

OPTIONS

- EXTERNAL POWER SUPPLY
- TEC COOLING & FAN / WATER COOLING
- EXTERNAL BEAM SHAPING
- OTHER WAVELENGTHS WITH LESS ENERGY: 635 nm / 760 nm / 940 nm / 1.55 μ m

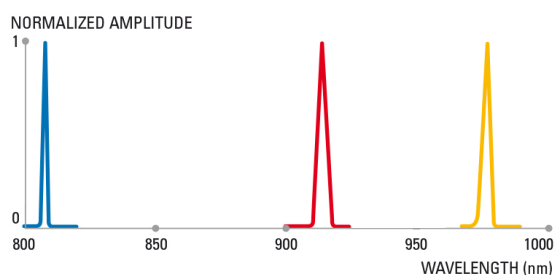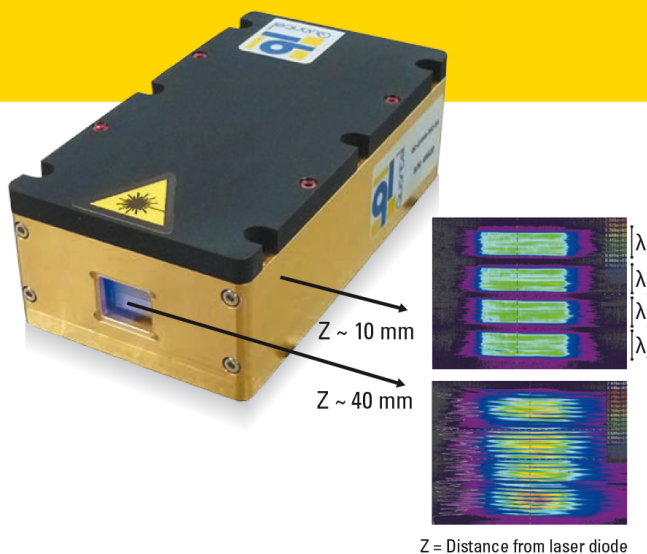

APPLICATIONS

- PHOTOACOUSTICS
- NIR SPECTROSCOPY
- ULTRASOUND GENERATION
- 3D FLASH LIDAR
- TIME OF FLIGHT

MARKETS

- MEDICAL
- AUTOMOTIVE
- CIVIL ENGINEERING
- SECURITY
- DEFENSE & SPACE
- AEROSPACE

OUTPUT ENERGY PER WAVELENGTH AT 25°C

PULSE WIDTH	5-mm EMISSION WIDTH		10-mm EMISSION WIDTH	
	MAXIMUM FREQUENCY	ENERGY PER WAVELENGTH	MAXIMUM FREQUENCY	ENERGY PER WAVELENGTH
130 ns	4 kHz	1 mJ	3 kHz	2 mJ
100 ns			4.5 kHz	1.5 mJ
80 ns	5 kHz	0.8 mJ	6 kHz	1 mJ

Output energy can be adjusted from 0 to 100% by varying the high voltage between 0 and 120 VDC.

OTHER SPECIFICATIONS

PARAMETERS	UNIT	5-mm WIDTH	10-mm WIDTH
DIODE CHARACTERISTICS			
Number of wavelengths			Up to 4
Mechanical pitch between wavelengths	mm		3.85
Number of diode bars per wavelength			Up to 6
Bar-to-bar pitch	µm		430
BEAM CHARACTERISTICS PER WAVELENGTH			
Spot width in SA ⁽¹⁾ (FWHM)	mm	5	10
Slow axis divergence (FWHM)	deg		< 12
Spot height in FA ⁽¹⁾ (FWHM)	mm		2.15
Fast axis divergence with FAC ⁽²⁾ (FWHM)	deg		< 3
Wavelength per stack, at 25°C ⁽³⁾	nm		808, 905 or 980 (± 5 Typ.)
Spectral width	nm		< 10
Polarization			TE mode

PARAMETERS	CONNECTOR MODEL	5-mm WIDTH	10-mm WIDTH
ELECTRICAL REQUIREMENTS			
Low voltage DC power supply	HIROSE (HR10-7R-4S(73))	12 VDC / < 0.2 A	
High voltage DC power supply ⁽⁴⁾		0-120 VDC / < 1 A / 12A peak	
Temperature sensor ⁽⁵⁾	LUMBERG (RSDF-4/0.2 M)	PT1000	
Trigger signal ⁽⁶⁾	4 SMA Jack/Female	Pulse mode, 5 V TTL, 1 ≤ width ≤ 5µs Frequency up to 10 kHz in burst mode	

PARAMETERS	UNIT	5-mm WIDTH	10-mm WIDTH
OPERATING CONDITIONS			
Operating temperature	°C	+ 15 to + 40	
Storage temperature	°C	- 20 to + 80	
Humidity		Non condensing for humidity rate lower than 70 %	
Lifetime at maximum energy		> 100 x 10 ⁹ shots	

(1) SA : Slow axis, FA : Fast axis

(2) FAC : Fast axis collimation


(3) Variation of wavelength with temperature is approximately 0.3 nm/°C.

(4) Output energy can be adjusted by varying high voltage between 0 and 120 VDC. In that case, the pulse width will decrease as well as the output energy (at 10% of maximum energy, pulse duration will be reduced by 30 %).

(5) A temperature sensor is included and fixed onto the laser diode base. Laser diode temperature can be monitored via a LUMBERG connector.

(6) One trigger signal is required per wavelength.

DIMENSIONS

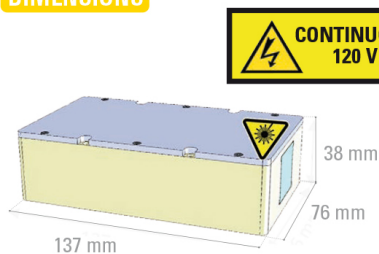

DRAWINGS: PIMK 10679 OR 10725



Many options and configurations are available. Please contact Lumibird to find the best match for your needs and compatibility between options.



Lumibird has locations across the globe that are available to provide support for any product, service or inquiry.

Visit www.lumibird.com to connect with any of our global sites.

